
# PRO-TRAINER



## The Ultimate Hydrotherapy System For Athletes

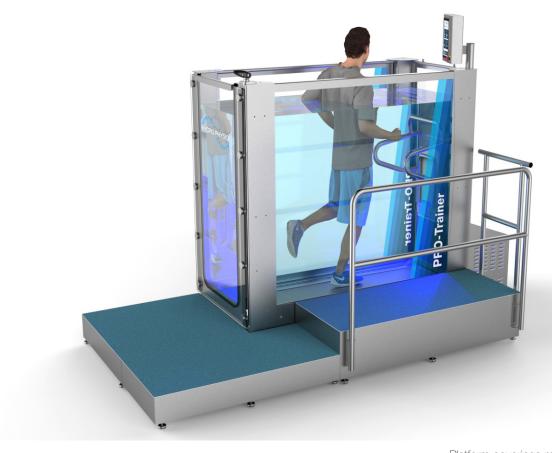

Platform coverings may vary from illustrated. Please check colour options when ordering.

The PRO-Trainer system includes a treadmill chamber with platform (as shown), plant equipment and water storage tanks (sited in a separate plant room).

Minimum room sizes:

Treadmill Room Plant Room

4.5m

Minimum ceiling height: 2.5m

Minimum door height: 2m

Minimum door width: 1.3m

Minimum space required: 36m<sup>2</sup>

Minimum floor loading: 1750kg/m<sup>2</sup>

5.5m

2.5m

Equipment Features







Speed Range



Water U



UV & Cart Filter



Underwater Lighting



Resistance 1



Touch Screen Controls



Incline



Fold Down Seat (130kg)



Down Deckir

Options



Access Ramp



Removable Handrails



Heavy Duty Seat (200kg)



UV & Sar

#### FEATURES

- [+] OUTWARD OPENING DOOR WITH PATENTED LATCH DEVICE
- [+] ISO 13485 COMPLIANT
- [+] MEDICAL GRADE STAINLESS STEEL CONSTRUCTION
- [+] STRUCTURAL GLASS WITH 360° MONITORING
- [+] 10" TOUCH SCREEN CONTROLS ON ADJUSTABLE SWIVEL ARM
- [+] 2 X WATER STORAGE TANKS
- [+] DUAL SPEED RESISTANCE JETS
- [+] FOLD DOWN SEATING (130kg capacity)

- [+] OPERATOR PLATFORM
- [+] CHEMICAL FEEDER
- [+] COMMERCIAL CARTRIDGE FILTRATION SYSTEM
- [+] UV FILTRATION
- [+] TREADMILL SYSTEM MONITORING
- [+] PRE-SET AND PROGRAMMABLE FUNCTION CONTROLS
- [+] POWERED TREADMILL INCLINE (8% gradient)
- [+] BLUE LED UNDERWATER LIGHTING

#### OPTIONS

- [+] ADDITIONAL HANDRAILS (Removable)
- [+] HEAVY DUTY FOLD DOWN SEATING (200kg capacity)
- [+] WHEELCHAIR ACCESS RAMP
- [+] CUSTOMISED PLATFORM
- [+] SAND FILTRATION SYSTEM (Instead of cartridge)

### TECHNICAL SPECIFICATION

Maximum load

Maximum water depth

Speed range

Fill / empty times

Temperature range

Trainer dimensions (Excluding display)

Complete system weight

Dry

Full

Capacity

Max distance between treadmill and plant equipment

Power

250kg (550lbs) assuming 50% weight bearing in water

0 - 1350mm (53")

0.5 - 16kph (0.3 - 10mph)

Approx 21/2 minutes to max depth

From ambient - 40°C (104°F)

L 1900mm (75") x W 880mm (35") x H 1800mm (71")

1300kg (2866 lbs)

3500kg (7716 lbs)

2200 litres (484 gals, 581 US gals)

10m (394")

400V 3 phase neutral & earth 50/60hz 40A per phase



+ 44 (0)1952 885112 lifestyle@HYDROPHYSIO.com www.HYDROPHYSIO.com Broseley, Telford, Shropshire, TF12 5JA. United Kingdom.

Over 900 HYDRO PHYSIO Systems Installed Worldwide





Designed & Manufactured In Great Britain

Sold through our International Distributor Network.